


# ER Series

## Screw Clamp Terminals with Push-In Cross Connection



	<b>ER2.5P</b> Width 5mm	<b>ER4P</b> Width 6mm
<b>Electrical Ratings</b>		
Voltage / Current / Cross Section	750V~ / 24A / 2.5mm <sup>2</sup>	750V~ / 32A / 4mm <sup>2</sup>
VDE	750V~ / 24A / 2.5mm <sup>2</sup>	750V~ / 32A / 4mm <sup>2</sup>
UL	600V~ / 20A / AWG 26-12	600V~ / 30A / AWG 26-10
ATEX	630V~ / 23A / 0.5mm <sup>2</sup>	630V~ / 29A / 0.5mm <sup>2</sup>
<b>Connection Data</b>		
Insulation Stripping Length / Torque	10mm / 0.4Nm	10mm / 0.5 - 0.8Nm
Solid Strand	0.5 - 4mm <sup>2</sup>	0.5 - 6mm <sup>2</sup>
Fine Strand, with Ferrule	0.5 - 2.5mm <sup>2</sup>	0.5 - 6mm <sup>2</sup>
AWG Conductor	26.....12	26.....10
<b>End Bracket</b>		
For MR 32 & MR 35	 ES1 ES4	ES1 ES4
<b>End Plate</b>		
Polyamide 66 - Thickness 3mm	 EP2.5-10	EP2.5-10
<b>Small Partition</b>		
Small Partition	SP1 / SP2.5-10	SP1
Large Partition	 SP2.5-10	SP2.5-10
<b>Cross-Connection</b>		
 CCS2.5/2	CCS2.5/2	CCS4/2
 CCS2.5/3	CCS2.5/3	CCS4/3
 CCS2.5/4	CCS2.5/4	CCS4/4
 CCS2.5/10	CCS2.5/10	CCS4/10
<b>Warning Label</b>		
 WL1 (With Symbol) WL2 (Without Symbol)	WL1 (With Symbol) WL2 (Without Symbol)	WL1 (With Symbol) WL2 (Without Symbol)
<b>Group Marking</b>		
 GM GM2	GM GM2	GM GM2

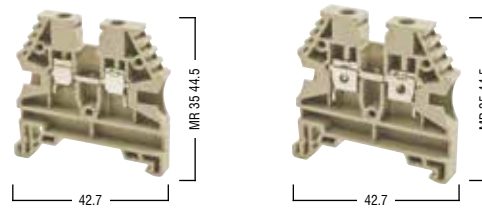