



PFM Series

Mini Push-Fit Terminals



	PFMR2.5 Width 5mm	PFM2.5 Width 5mm	PFPEM2.5 Width 5mm
Electrical Ratings			
Voltage / Current / Cross Section	800V~ / 24A / 2.5mm ²	800V~ / 24A / 2.5mm ²	-V~ / -A / 2.5mm ²
UL		600V~ / 20A / AWG 22-12	-V~ / -A / AWG 22-12
Connection Data			
Insulation Stripping Length	10mm	10mm	10mm
Solid Strand	0.5 - 4mm ²	0.5 - 4mm ²	0.5 - 4mm ²
Fine Strand with Ferrule	0.5 - 2.5mm ²	0.5 - 2.5mm ²	0.5 - 2.5mm ²
AWG Conductor	22.....12	22.....12	22.....12
End Bracket			
	ES1	ES5 (screwless)	ES5 (screwless)
	ES4 (screwless)		
End Plate			
Polyamide 66 - Thickness 1.2mm	EPPFM2.5	EPPFM2.5	EPPFME2.5
Technical Data			
Max. Clamping Range	4mm ²	4mm ²	4mm ²
Rated Impulse Voltage / Pollution Severity	8kV / 3	8kV / 3	8kV / 3
Insulation Material Group / Guage Pin Code (acc. IEC 60947-1)	1 / A3	1 / A3	1 / A3
Protection Class / Protection Conductor Type	IP20 / -	IP20 / -	IP20 / PE

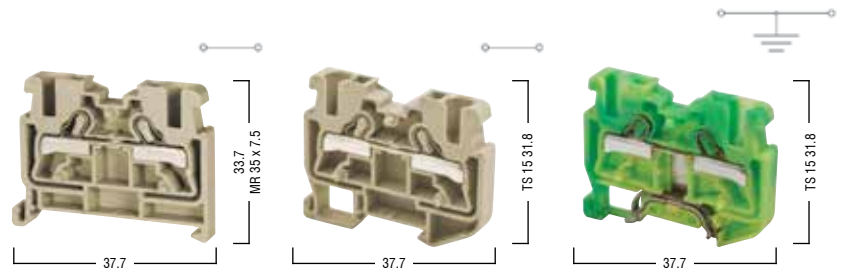