









# PFT Series


## Multi-Level Push-Fit Terminals






Electrical Ratings	
Voltage / Current / Cross Section	500V~ / 32A / 4mm <sup>2</sup>
UL	
Connection Data	
Insulation Stripping Length	10mm
Solid Strand	0.5 - 6mm <sup>2</sup>
Fine Strand with Ferrule	0.5 - 4mm <sup>2</sup>
AWG Conductor	22.....10
End Bracket	
	ES1 ES4 (screwless)
End Plate	
Polyamide 66 - Thickness 1.0mm	EPPFD4
	
Cross-Connection	
	CCS4/2
	CCS4/3
	CCS4/4
	CCS4/10
Group Marking	
	
Technical Data	
Max. Clamping Range	6mm <sup>2</sup>
Rated Impulse Voltage / Pollution Severity	6kV / 3
Insulation Material Group / Guage Pin Code (acc. IEC 60947-1)	1 / A4
Protection Class / Protection Conductor Type	IP20 / -

### PFD4

Width 6mm

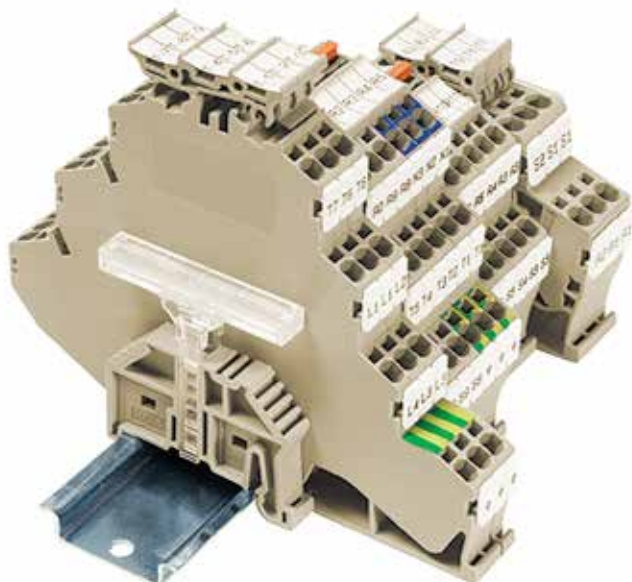



<b>PFT3</b>	Width 5mm	<b>PFT2E</b>	Width 5mm	<b>PFT3E</b>	Width 5mm
500V~ / 24A / 2.5mm <sup>2</sup>		500V~ / 24A / 2.5mm <sup>2</sup>		500V~ / 24A / 2.5mm <sup>2</sup>	
10mm		10mm		10mm	
0.5 - 4mm <sup>2</sup>		0.5 - 4mm <sup>2</sup>		0.5 - 4mm <sup>2</sup>	
0.5 - 2.5mm <sup>2</sup>		0.5 - 2.5mm <sup>2</sup>		0.5 - 2.5mm <sup>2</sup>	
22.....12		22.....12		22.....12	
ES1		ES1		ES1	
ES4 (screwless)		ES4 (screwless)		ES4 (screwless)	
EPPFT3		EPPFT3		EPPFT3	
CCS2.5/2		CCS2.5/2		CCS2.5/2	
CCS2.5/3		CCS2.5/3		CCS2.5/3	
CCS2.5/4		CCS2.5/4		CCS2.5/4	
CCS2.5/10		CCS2.5/10		CCS2.5/10	
GMPF2		GMPF2		GMPF2	
GMPF3		GMPF3		GMPF3	
4mm <sup>2</sup>		4mm <sup>2</sup>		4mm <sup>2</sup>	
6kV / 3		6kV / 3		6kV / 3	
1 / A3		1 / A3		1 / A3	
IP20 / -		IP20 / PE		IP20 / PE	