









PFT 3S Series



Three Level Sensor Push-Fit Terminals



PFT3S Width 5mm

Electrical Ratings	
Voltage / Current / Cross Section	250V~ / 24A / 2.5mm ²
UL	300V~ / 20A / AWG 22-12
Connection Data	
Insulation Stripping Length	10mm
Solid Strand	0.5 - 4mm ²
Fine Strand with Ferrule	0.5 - 2.5mm ²
AWG Conductor	22.....12
End Bracket	
	ES1 ES4 (screwless)
End Plate	
Polyamide 66 - Thickness 1.5mm 	EPPFT3S
Cross-Connection	
	CCS2.5/2
	CCS2.5/3
	CCS2.5/4
	CCS2.5/10
Technical Data	
Max. Clamping Range	4mm ²
Rated Impulse Voltage / Pollution Severity	8kV / 3
Insulation Material Group / Gauge Pin Code (acc. IEC 60947-1)	1 / A3
Protection Class / Protection Conductor Type	IP20 / -

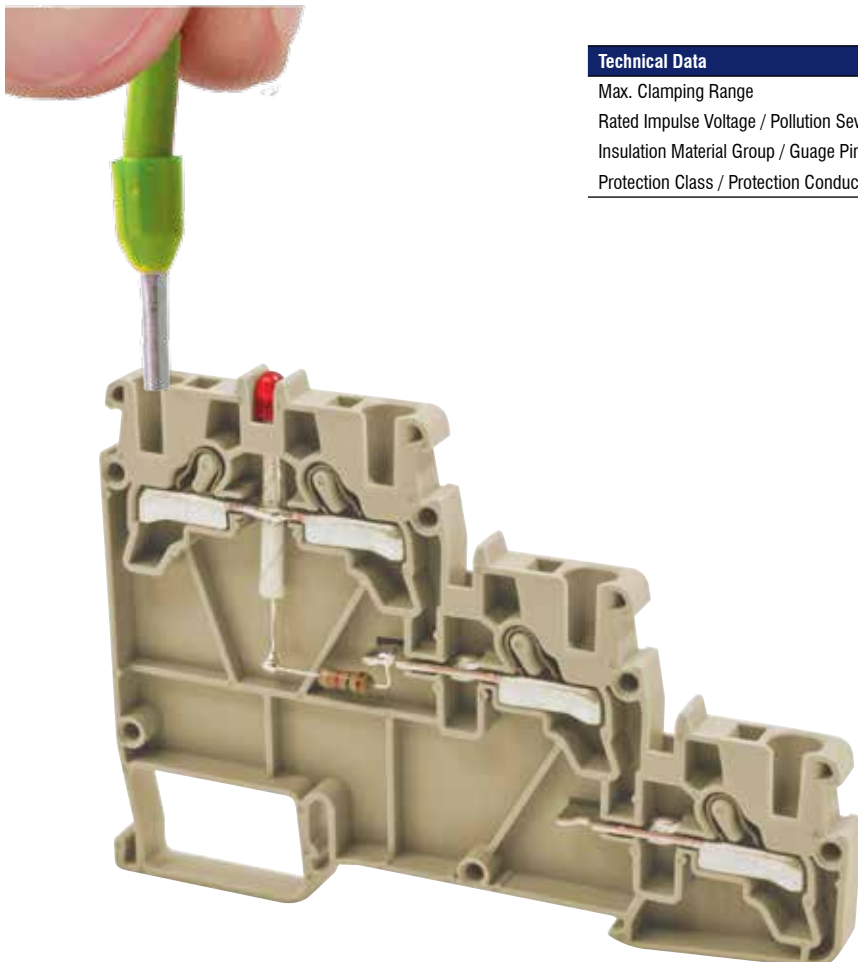



PFT3SLDN	Width 5mm	PFT3SLDP	Width 5mm
24VDC~ / 24A / 2.5mm ²		24VDC~ / 24A / 2.5mm ²	
10mm		10mm	
0.5 - 4mm ²		0.5 - 4mm ²	
0.5 - 2.5mm ²		0.5 - 2.5mm ²	
22.....12		22.....12	
ES1		ES1	
ES4 (screwless)		ES4 (screwless)	
EPPFT3S		EPPFT3	
CCS2.5/2		CCS2.5/2	
CCS2.5/3		CCS2.5/3	
CCS2.5/4		CCS2.5/4	
CCS2.5/10		CCS2.5/10	
4mm ²		4mm ²	
8kV / 3		8kV / 3	
1 / A3		1 / A3	
IP20 / -		IP20 / -	

