








PFDPE Series

Multi-Input / Output Push-Fit Earth Terminals

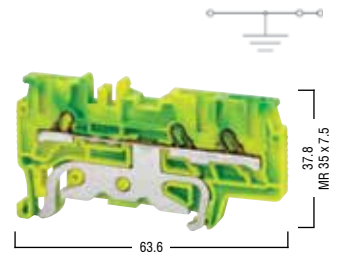

Electrical Ratings	
Voltage / Current / Cross Section	-V~ / -A / 1.5mm ²
UL	
Connection Data	
Insulation Stripping Length	10mm
Solid Strand	0.5 - 2.5mm ²
Fine Strand with Ferrule	0.5 - 1.5mm ²
AWG Conductor	22.....14
End Bracket	
	ES1 ES4 (screwless)
End Plate	
Polyamide 66 - Thickness 1.5mm	 EPPFD1.5PE
Technical Data	
Max. Clamping Range	2.5mm ²
Rated Impulse Voltage / Pollution Severity	8kV / 3
Insulation Material Group / Gauge Pin Code (acc. IEC 60947-1)	1 / A3
Protection Class / Protection Conductor Type	IP20 / PE

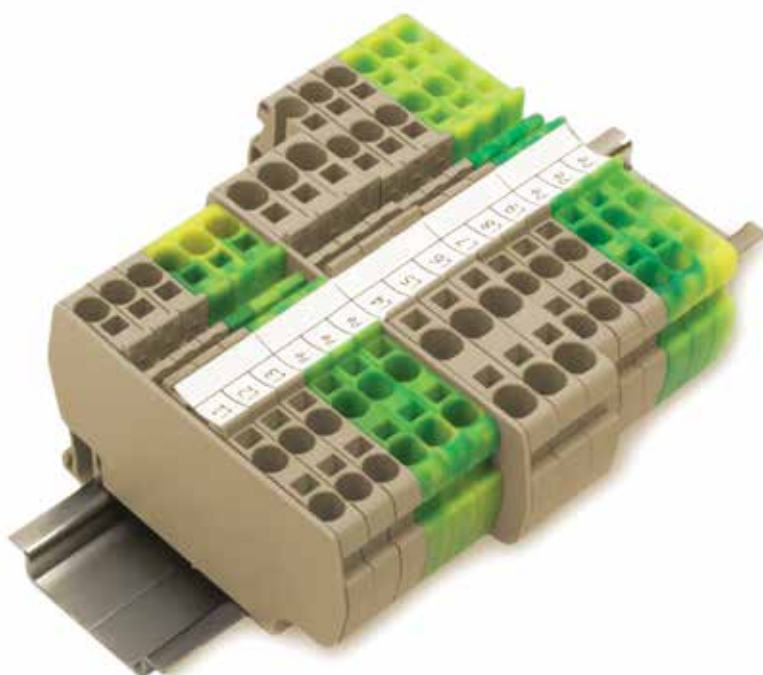



PFD1.5CPE	Width 4.2mm	PFD2.5PE	Width 5mm	PFD2.5CPE	Width 5mm
-V~ / -A / 1.5mm ²		-V~ / -A / 2.5mm ²		-V~ / -A / 2.5mm ²	
		600V~ / -A / AWG 22-12		600V~ / -A / AWG 22-12	
10mm		10mm		10mm	
0.5 - 2.5mm ²		0.5 - 4mm ²		0.5 - 4mm ²	
0.5 - 1.5mm ²		0.5 - 2.5mm ²		0.5 - 2.5mm ²	
22.....14		22.....12		22.....12	
ES1		ES1		ES1	
ES4 (screwless)		ES4 (screwless)		ES4 (screwless)	
EPPFD1.5CPE		EPPFD2.5PE		EPPFD2.5CPE	
2.5mm ²		4mm ²		4mm ²	
8kV / 3		8kV / 3		8kV / 3	
1 / A3		1 / A3		1 / A3	
IP20 / PE		IP20 / PE		IP20 / PE	

